



MS-12D01-G0085

直接形式

G-SWITCH P/N

G0085=0.85mm

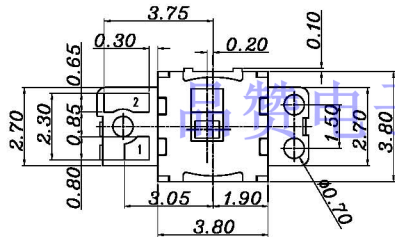

Recommended PAD Layout $\phi \pm 0.05$

TOP VIEW

G-Switch:

使用温度范围: $-20 \sim 70^{\circ}\text{C}$

耐压: AC250V 50Hz 1min


额定负荷: DC 12V 0.5A

操作力: $200\text{g} \pm 100\text{gf}$

接触电阻: $\leq 0.05\Omega$

动作寿命: 10000次

绝缘电阻: $\geq 100\text{M}\Omega$



CIRCUIT DIAGRAM



RoHS
Compliant
2002/95/EC



b-Switch

G-Switch Electronic Technology CO.,Ltd.

Unless otherwise specified, Tolerance:
 X ± 0.30
 X.x ± 0.20
 X.xx ± 0.15
 X.xxx ± 0.10
 Angles $\pm 3^{\circ}$

DESIGN 原研机	DATE 2016.05.29	TITLE:
CHECKED	DATE	MS-12D01-G0085
APPROVED	DATE	
http://www.dg-switch.com		REV: X1
TEL:0769-82388879		SCALE: 4:1
		UNIT: mm
		SIZE: A4
		SHEET: 1/1

REV: X1 SCALE: 4:1 UNIT: mm
 SIZE: A4 SHEET: 1/1