



MS-42D20-GXXX


直接形式

G-SWITCH P/N

- G020=2.0mm
- G030=3.0mm
- G040=4.0mm
- G050=5.0mm

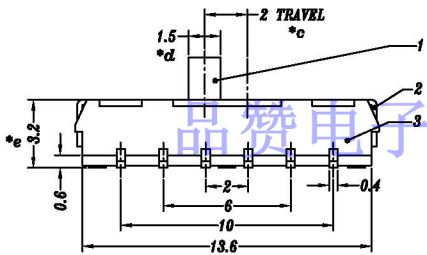

P.C.B LAYOUT



SCHEMATIC

G-Switch:

使用温度范围: -20~70℃
 耐压: AC250V 50Hz 1min
 额定负荷: DC 12V 0.5A
 操作力: 200g±100gf
 接触电阻: ≤0.05Ω
 动作寿命: 10000次
 绝缘电阻: ≥100MΩ

4	INSBOARD CONTACT	BERYLLIUM COPPER	4	Ag PLATED
3	INSBOARD CASE	PA6T/LCP/0.3mm BRASS	1	BLACK/Ag PLATED
2	INSBOARD COVER	SM	1	NO PLATED
1	INSBOARD RING	PA6T+PA66	1	BLACK
NO.	PART	MATERIAL	QTY	FINISHING



Unless otherwise specified, Tolerance:
 ±0.30
 X .x ±0.20
 X .xx ±0.15
 X .xxx ±0.10
 Angles ±0°

G-Switch Electronic (HongKong) CO.,Ltd.

DESIGN	陈伟帆	DATE	2016.05.29	TITLE:	MS-42D20-GXXX		
CHECKED		DATE		REV.:	X1	SCALE:	4:1
APPROVED		DATE		UNIT:	mm	SHEET:	1/1
http://www.dg-switch.com TEL:0769-82388879				SIZE:	A4		