


备注:

1. 材质:
 - 1.1 胶芯: LCP+30%G.F UL94V-0
 - 1.2 端子: COPPER ALLOY; 镍底, 镀金 $X\mu$ "
 - 1.3 外壳: SUS304; 表面镀镍 100μ " 或亮锡 100μ "
 - 1.3 护板: SUS304;
2. 主要特性:
 - 2.1 额定电流: 3A
 - 2.2 接触阻抗: $40m\Omega$ MAX
 - 2.3 绝缘阻抗: $100M\Omega$ MIN 250V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度 $250\pm 5^\circ C$, 时间 $5\pm 0.5s$
 - 2.6 整体插入力: 2.00kgf MAX
整体拔出力: 0.80kgf MIN
 - 2.7 使用寿命: 10000 次
 - 2.8 工作温度: $-55^\circ C \sim +85^\circ C$

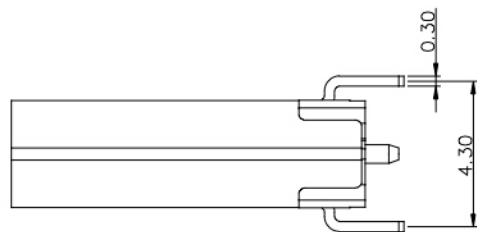

	G-Switch Electronic Technology CO., Ltd.		
	DESIGN 陈锋枫	DATE 2016.05.29	TITLE:
Unless otherwise specified, Tolerance:		DATE	GT-USB-7012
X. ±0.30		DATE	
X.x ±0.20	APPROVED	DATE	REV.: X1 SCALE: 4:1 UNIT: mm
X.xx ±0.15	http://www.dg-switch.com		SIZE: A4 SHEET: 1/1
X.xxx ±0.10	TEL:0769-82388879		
Angles ±3°			