
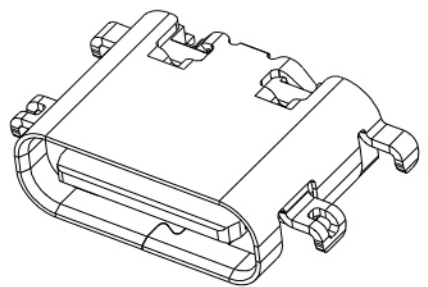


A=L0.8mm
B=L1.1mm
C=L1.6mm

- NOTES:
- CURRENT RATING: 3A MAX.;
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - TEMPERATURE RANGE: -30°C~85°C;
 - CONTACT RESISTANCE: 40mΩ MAX.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
 - DURABILITY: 10,000 CYCLES MIN.;
 - INSERTION FORCE: 5N~20N;
 - EXTRACTION FORCE:
(1) INITIAL: 8N~20N;
(2) AFTER DURABILITY: 6N~20N.
 - PRODUCT MEET THE REQUEST OF THE RoHS.

A1			A4	A5	A6	A7	A8	A9		A12	
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBU1	VBUS	RX2-	RX2+	GND
GND	RX1+	RX1-	VBUS	SBU2	D-	D+	CC2	VBUS	TX2-	TX2+	GND
B12			B9	B8	B7	B6	B5	B4			B1

PIN ASSIGNMENT
(FRONT VIEW)

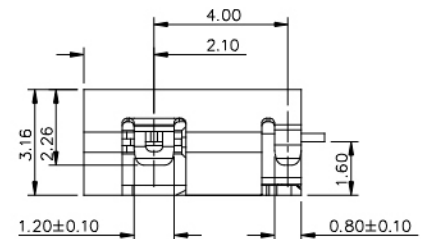

G-Switch Electronic Technology CO.,Ltd.

Unless otherwise specified, Tolerance:
X. ±0.30
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
Angles ±3°

DESIGN 陈锋枫 DATE 2016.05.29
CHECKED DATE
APPROVED DATE
<http://www.dg-switch.com>
TEL:0769-82388879

TITLE:
GT-USB-7014X
REV.: X1 SCALE: 4:1 UNIT: mm
SIZE: A4 SHEET: 1/1